


## MAGLOCKS

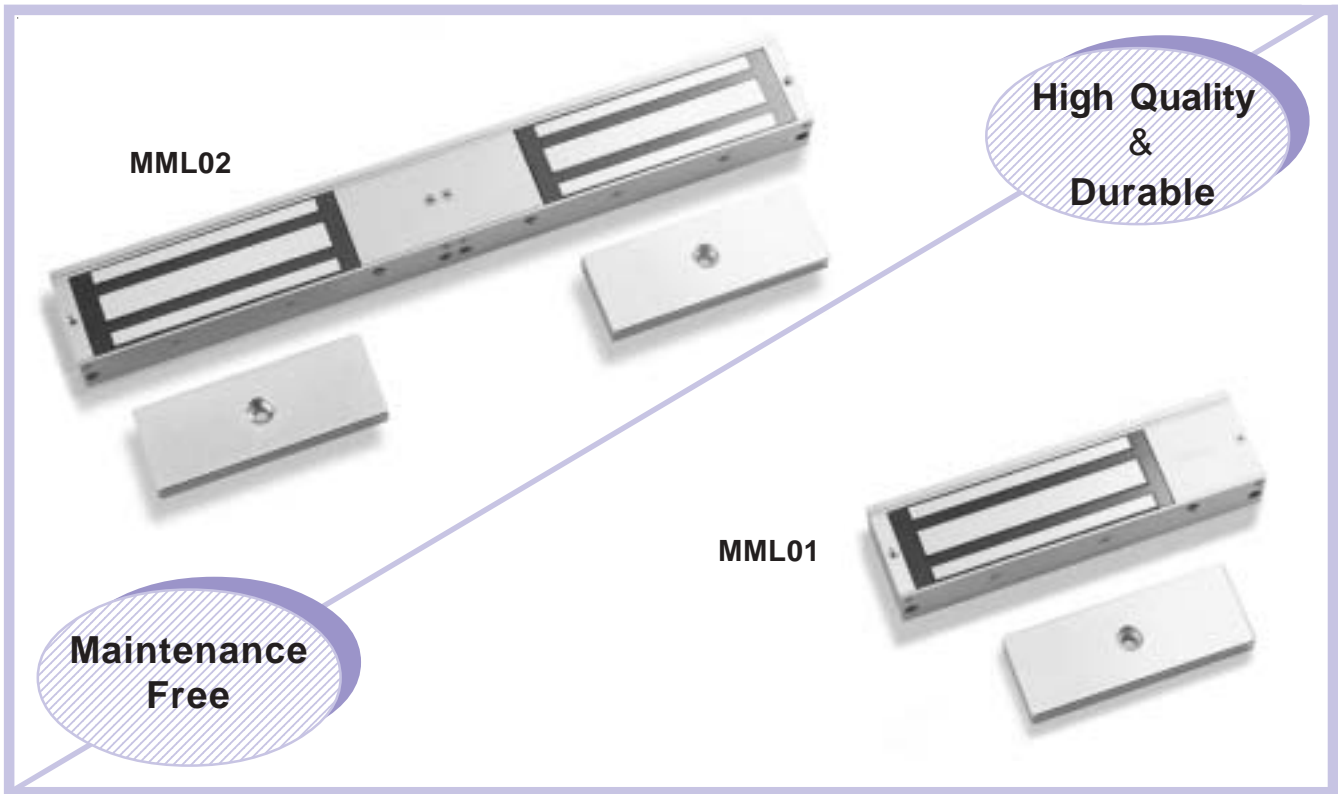


Model Numbers				Holding Force (lbs.)	Current (mA/24V)	Magnet Dimension (mm)	Armature Dimension (mm)	Mounting	Certificate
Basic	+ LED	+ Timer	+DSS (Door Status Sensor)						
MML150	MML150L	MML150LT	MML150LTDS	1500	300	286x73x 40	286x73x 40	Surface	CE
MML01	MML01L	MML01LT	MML01LTDS	1200	250	266x 73x 40	185x 61x 16	Surface	UL,CE
MML02	MML02L	MML02LT	MML02LTDS	2x1200	2x250	532x 73x 40	185x 61x 16	Surface	UL,CE
MMLSH01	MMLSH01L	MMLSH01LT	MMLSH01LTDS	600	250	532x 73x 40	185x38x12.5	Surface	UL,CE
MMLSH02	MMLSH02L	MMLSH02LT	MMLSH02LTDS	2x600	2x250	456x 38x 27	185X38X12.5	Surface	UL,CE
MMLS01	MMLS01L	MMLS01LT	MMLS01LTDS	600	250	228x 38x 27	185x38x12.5	Mortise	UL,CE
MML300				300	180	202x4.5x21	130x32x8	Mortise	CE
MML300R With Lock Status Sensor (Reed Switch)				300	180	202x4.5x21	130x32x8	Mortise	CE
MML300H				300	180	165x34.5x21	130x32x8	Surface	CE
MML300HR With Lock Status Sensor (Reed Switch)				300	180	165x34.5x21	130x32x8	Surface	CE
<b>Gate Lock</b>									
MGL600				600	250	203x44x40	185x38x16	Surface	CE
MGL600R With Lock Status Sensor (Reed Switch)				600	250	203x44x40	185x38x16	Surface	CE
MGL1200				1200	250	266x63x40	185x61x16	Surface	CE
MGL1200R With Lock Status Sensor (Reed Switch)				1200	250	266x63x40	185x61x16	Surface	CE
<b>Shear Lock</b>									
MMLM01 With Lock Status & Timer				2000	900*	270x35x30	245x35x30	Surface	CE

**All above locks are Dual Voltage Operation (12 & 24VDC)**

To find current consumption @12VDC, multiply the above current by 2

\* Current at holding position of MMLM01, 300mA/24V

## MAGLOCKS

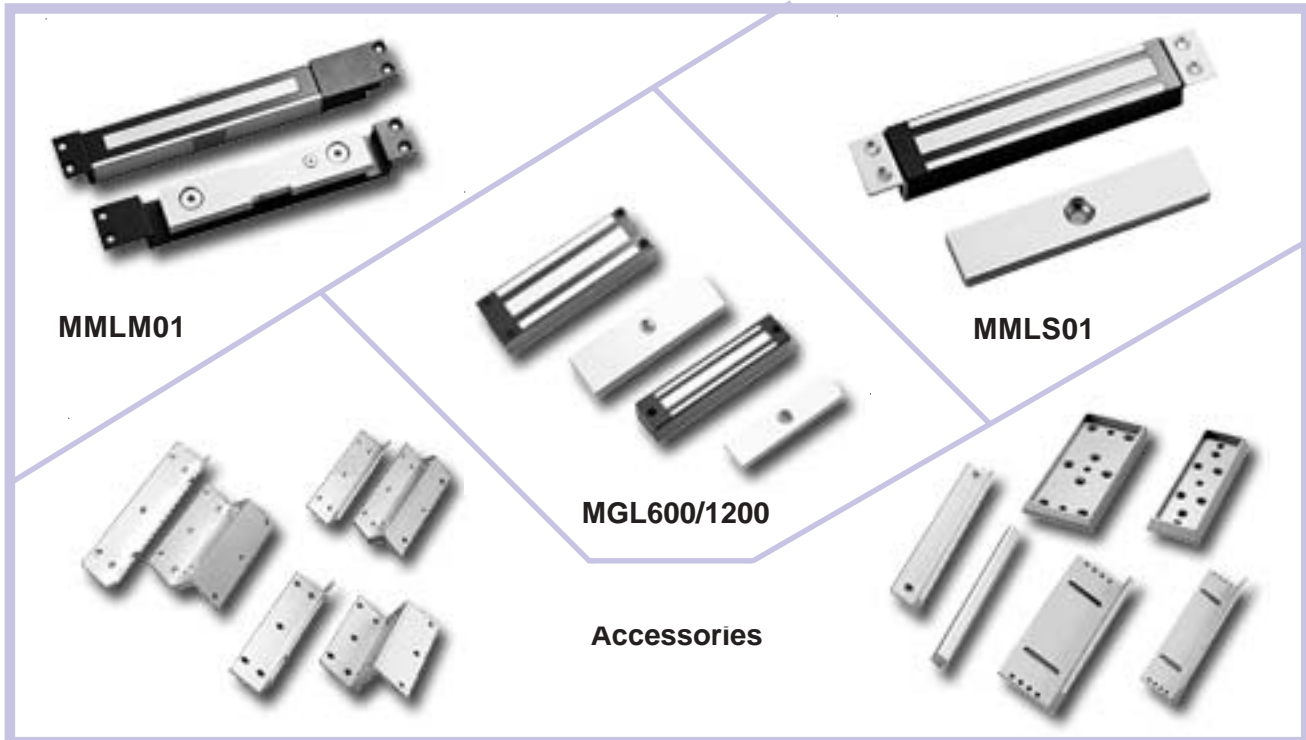

- Immediate door release when lock is de-energized
- No residual magnetism
- Silent operation
- Field selectable operation voltage (12/24VDC)
- Low power draw
- Adjustable mounting brackets plus all types of L, Z and U brackets for all types of inswinging and outswinging door installation for wood, steel, aluminum and glass

### Accessories

Model Number	Description	Model Number	Description
B1001	Adjustable L-bracket for 1200LBS EM lock	B1022A(Z)	Z-Bracket for 300LBS. EM Lock
B1011	Adjustable L-bracket for 600LBS EM lock	B0001A	1200LBS. armature housing on glass door
B1002A(L)	L-Bracket for 1200LBS. EM Lock	B0011A	600LBS. armature housing on glass door
B1002A(Z)	Z-Bracket for 1200LBS. EM Lock	B1003	L-Bracket for EM Lock installation
B1012A(L)	L-Bracket for 600LBS. EM Lock	B1004	Filler bar for EM Lock installation 5/8"
B1012A(Z)	Z-Bracket for 600LBS. EM Lock	B1005	Filler bar for EM Lock installation 1/2"
B1022A(L)	Z-Bracket for 300LBS. EM Lock	U-185	600/1200 LBS. armature U-Bracket on glass